

FIG. 1

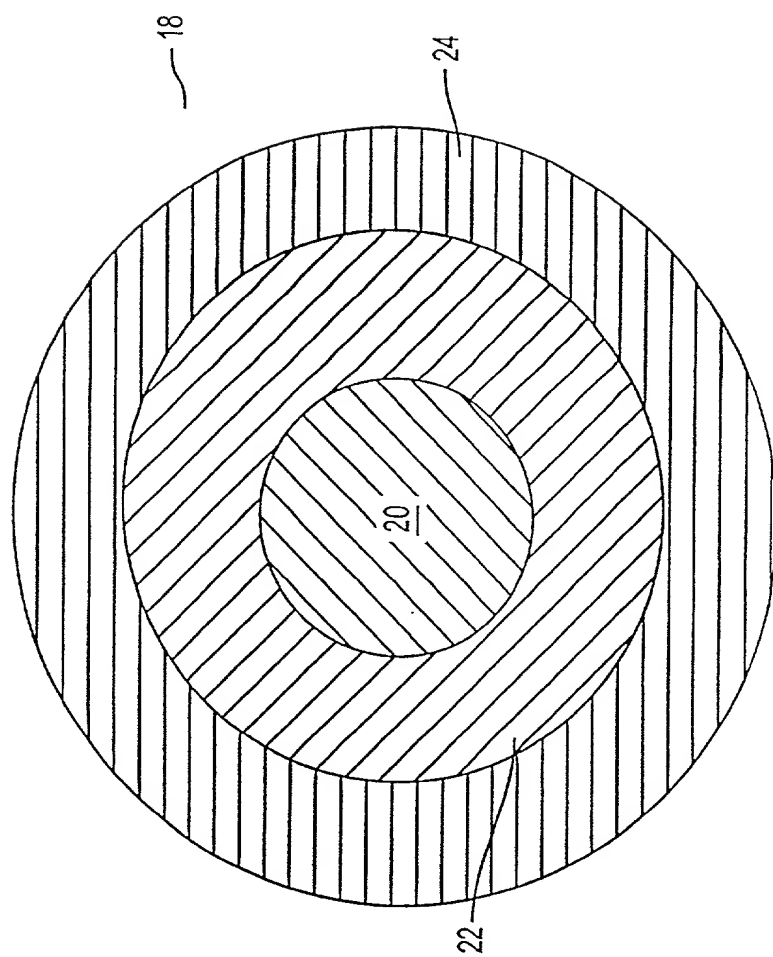


FIG. 2

FIG. 3 is a schematic diagram of a device 100 in a first configuration. The device 100 includes a circular component 18, a rectangular component 26, a rectangular component 34, a rectangular component 36, and a trapezoidal component 28. The circular component 18 is positioned at the top. The rectangular component 26 is positioned below the circular component 18. The rectangular component 34 is positioned to the left of the rectangular component 26. The rectangular component 36 is positioned to the right of the rectangular component 26. The trapezoidal component 28 is positioned to the left of the rectangular component 26. The device 100 is shown in a first configuration where the components are arranged in a specific manner.

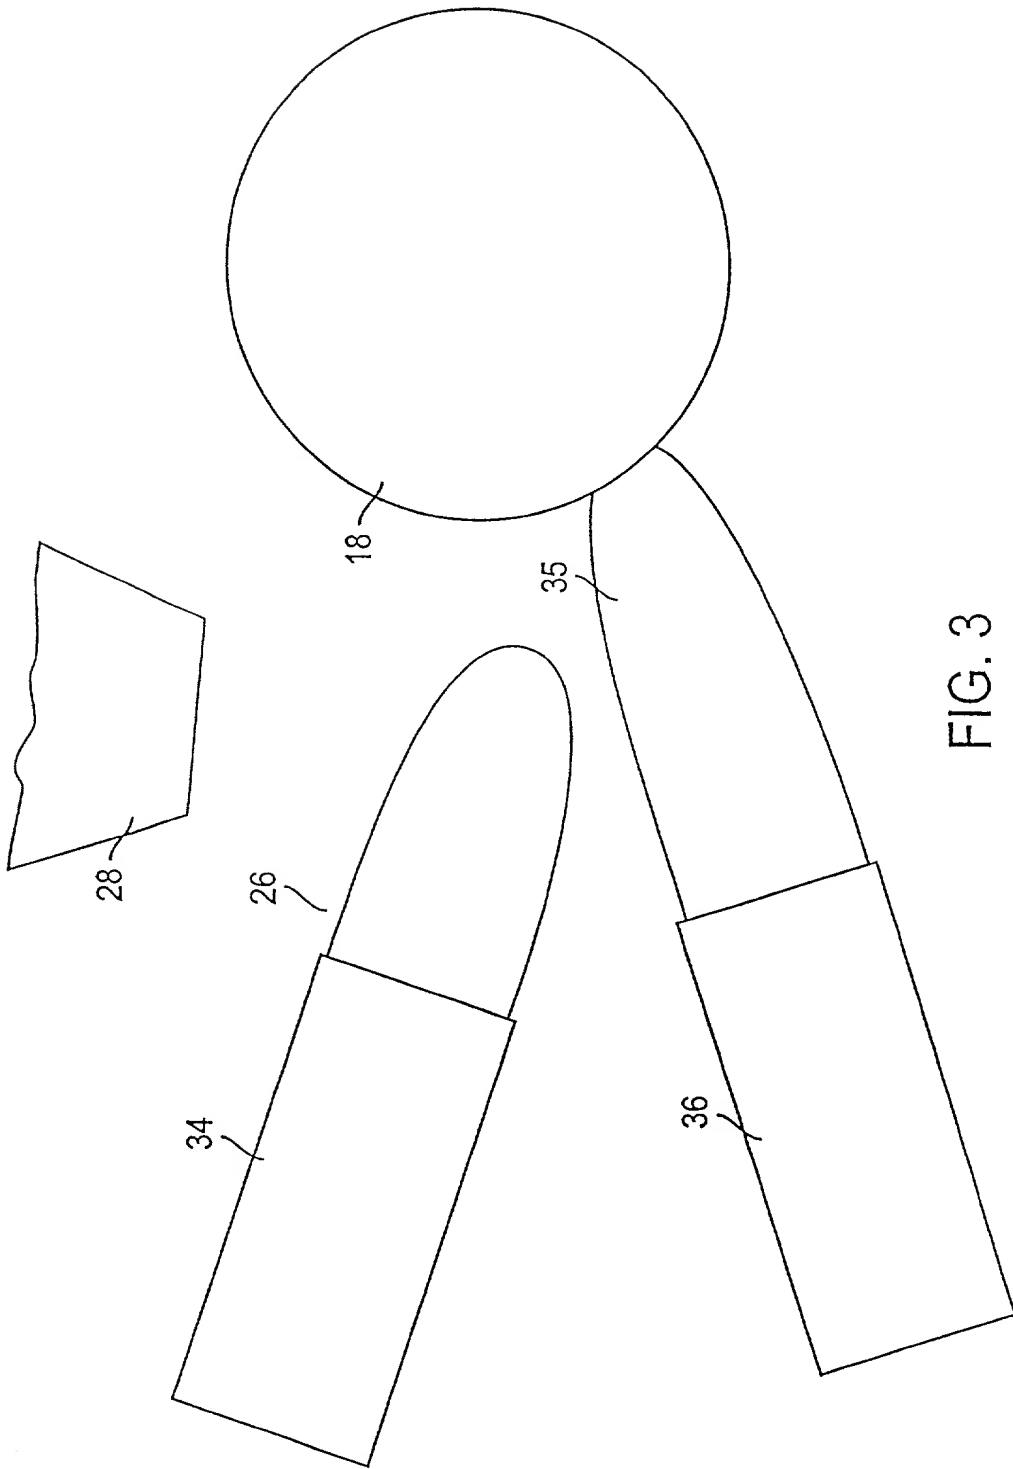


FIG. 3

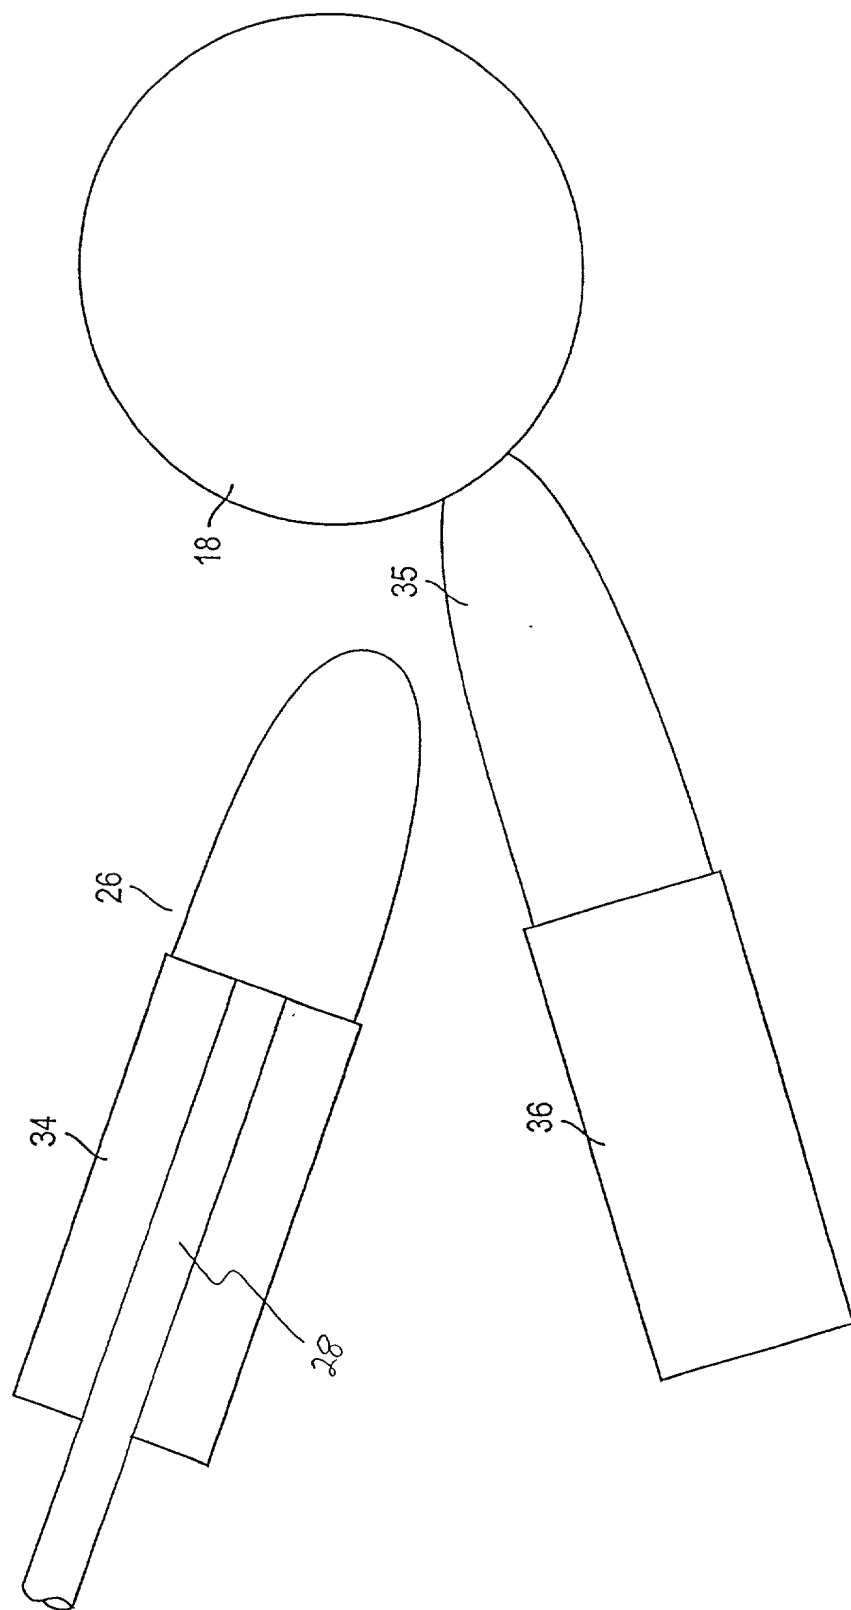


FIG. 4